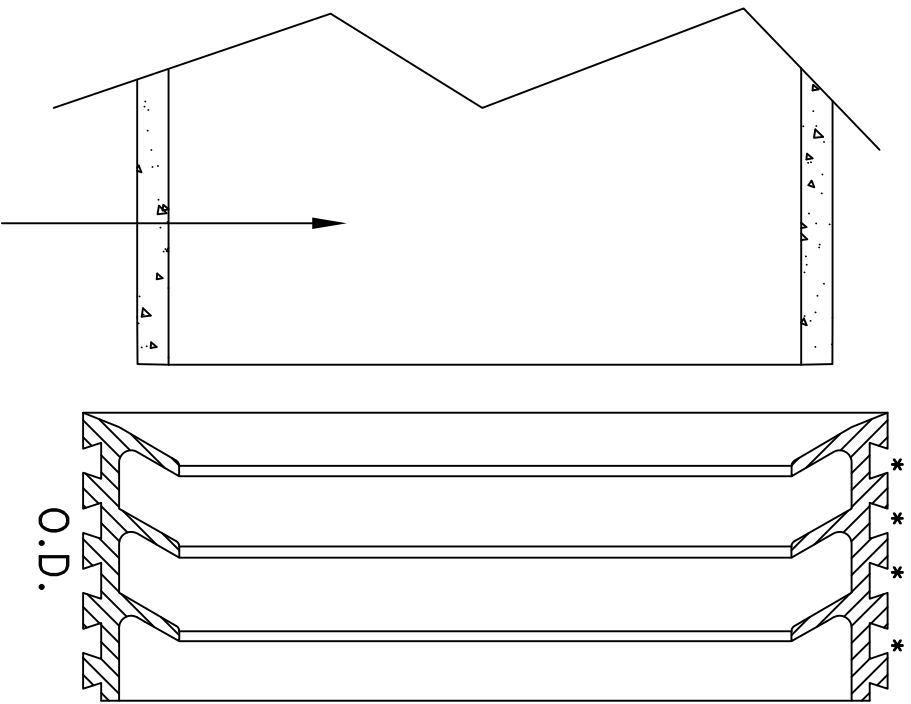* Banding area if needed. *

O.D.

Typical RCP or PVC Pipe cleaned & ready to receive Waterstop Gasket.

15" & larger Profile shown.

ASTM material spec's shown apply to material physical properties only.

Structure wall.

Manhole cut-out for Pipe inlet. To be grouted around the waterstop.

Clean CONC/PVC pipe before the gasket is stretched onto the OD as shown. If needed, stainless clamps placed in grooves. As pipe is placed into MH wall, center gasket in wall cut-out, support pipe, pack cut-out with proper grout, backfill after it has fully set-up.

Cut-out should be 4" diam. larger than pipe OD.

Typical Installation of the Vertite Waterstop Gasket.

Sym	Revisions	Date	By

VERTEX

Mogadore OH 44260 USA

Elastomeric Seals

Description			
VERTITE W-S, Waterstop			

Material			
C425, C443, C923, F477, 50±5			

Scale	Date	Drawn By	Die Number
NTS	12-28-00	WCA	V-0033