


* Banding area if needed. *

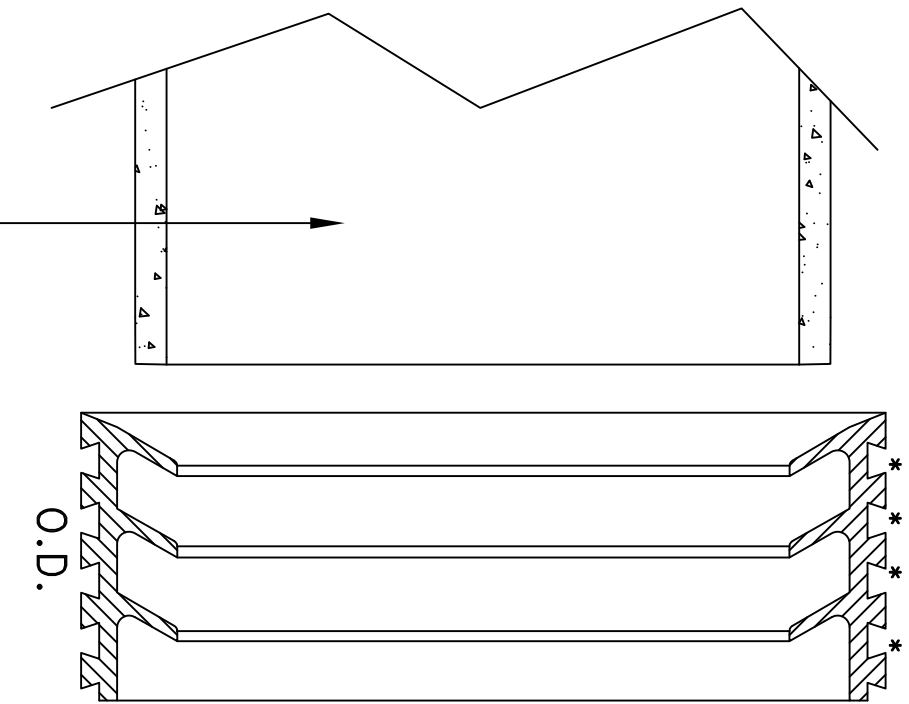

Typical RCP or PVC Pipe cleaned & ready to receive Waterstop Gasket.

15" & larger Profile shown.

Manhole cut-out for Pipe inlet. To be grouted around the waterstop.

Structure wall.

Sym	Revisions	Date	By

Clean CONC/PVC pipe before the gasket is stretched onto the OD as shown. If needed, stainless clamps placed in grooves. As pipe is placed into MH wall, center gasket in wall cut-out, support pipe, pack cut-out with proper grout, backfill after it has fully set-up.

Cut-out should be 4" diam. larger than pipe OD.

Typical Installation of the Vertite Waterstop Gasket.



Elastomeric Seals

Mogadore OH 44260 USA

Description

VERTITE W-S, Waterstop

Material

C425, C443, C923, F477, 50±5

Scale	Date	Drawn By	Die Number
NTS	12-28-00	WCA	V-0033